

EDGE5i/S200

SLIMLINE PLASTER-UP-TO LOUDSPEAKER

DATASHEET Rev. 1.0 | 2-10-2025

E&OE | SUBJECT TO CHANGE WITHOUT PRIOR NOTICE



AMINA

IMMERSIVE INVISIBLE SOUND


Product Description

The Edge 5i/S200 is the slimline variant of the Edge 5i, purpose-built for installations where wall or ceiling depth is restricted. Just 200mm wide, it integrates effortlessly into challenging layouts while retaining the same plaster-up-to ridge detail for seamless architectural finishes. Featuring proprietary Amina exciters in combination with Optidrive®, Opti-damping®, Reduced Resonance Exciter® and ToneRelief® panel technologies, the Edge 5i/S200 maintains the warm, natural voicing of the Edge family in a more compact form. This makes it an ideal solution for design-sensitive projects where space is at a premium but the listening experience must remain immersive and engaging.

Example Applications

Medium-power residential/commercial distributed audio solutions and multi-channel surround sound systems. Designed to be installed into dryline walls/ceilings, but may also be used as a post-plaster retrofit in applications with a plaster skim coat. Can be supplied with high-impedance 100/70V transformer.

Frequency Response

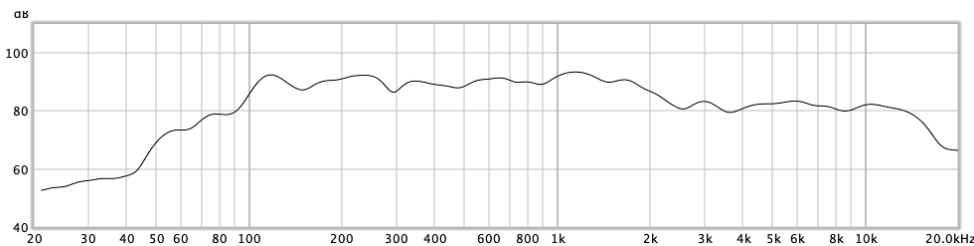

Specifications (Measured at 20°C)

Edge5i/S200

Nominal impedance	4 Ohms
Power handling (100 hour continuous/peak)	50W/100W
Sensitivity (1m/2.83Vrms)	86dB SPL
Frequency response (-6dB)	76Hz - 14kHz
Useable frequency range (+/-10dB)	70Hz - 15.5kHz
Dispersion angle	180° x 180° at specified frequency range
Electrical connection	Blue butt-splice crimp terminals (14-16 AWG)
Dimensions	450mm x 345mm x 36mm (17 ^{3/4} " x 13 ^{5/8} " x 1 ^{7/16} ")
Product weight	1.3kg (2lb 14oz)
Fixing requirements	Backbox CV345 or Mounting Blocks
In-line protection unit	Guardian 2/8/16
Manufacturer limited warranty	10 years

Amina Technologies Limited

Cirrus House, Glebe Road, Huntingdon, Cambridgeshire, PE29 7DL, England

+44 (0) 1480 354390 | info@aminasound.com | www.aminasound.com



RoHS
Compliant

